

SPECIFICATIONS

| MODEL NUMBER | POWER | TABLE | BORE | STROKE | RAM SPEED | | | CAPACITY (TONS) | WEIGHT (LBS.) | SHIPPING DIMENSIONS | | |
|--------------|--------------|-----------|------|--------|-----------|-------|--------|-----------------|---------------|---------------------|------|-----|
| | | | | | ADVANCE | PRESS | RETURN | | | L | W | H |
| GSP-100 48 | 5 HP 3 phase | 48" x 96" | 9" | 16" | 24 IPM | 6 IPM | 31 IPM | 100 | 12,000 | 88" | 112" | 80" |

Standard voltages available - please specify when ordering.


GANTRY STRAIGHTENING PRESS 100 Ton

STANDARD FEATURES


- ✓ **Powered movable workhead** for off-center work allows operator to position the cylinder from left to right and front to back with the touch of a lever.
- ✓ **Cylinder activation** is fingertip controlled, the more the hand lever is engaged the more the ram movement is accelerated. This allows the operator to control the proper speed for the task.
- ✓ **Pressure regulator** to limit the ram pressure.
- ✓ **Flat ram nose** can be easily changed to allow the user to adapt the press to a specific job.
- ✓ **Low pressure** hydraulic system maintains lower oil temperatures, resulting in higher efficiency and safer operation.
- ✓ **All hydraulic and mechanical parts are standard** in the industry, and available throughout North America.

Optional:

Handheld wireless remote control with variable speed on all axis, permits the operator to move freely around the press.

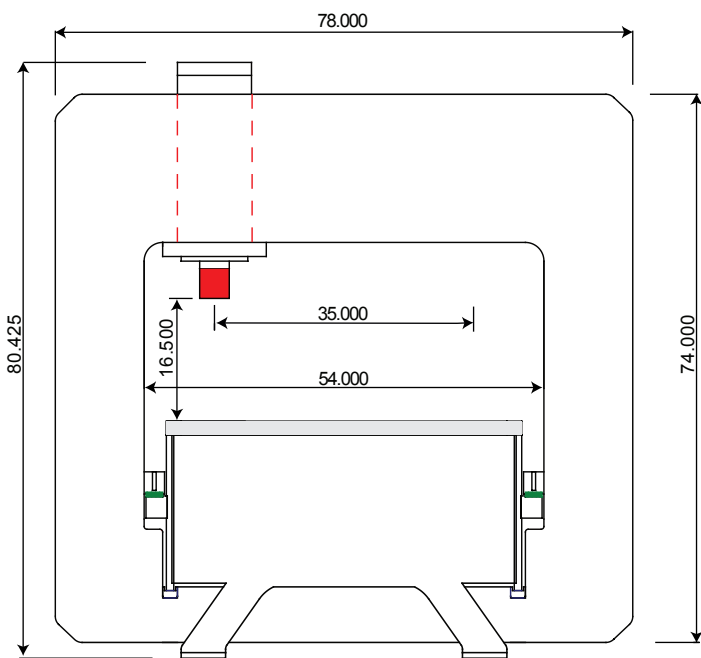

Front View

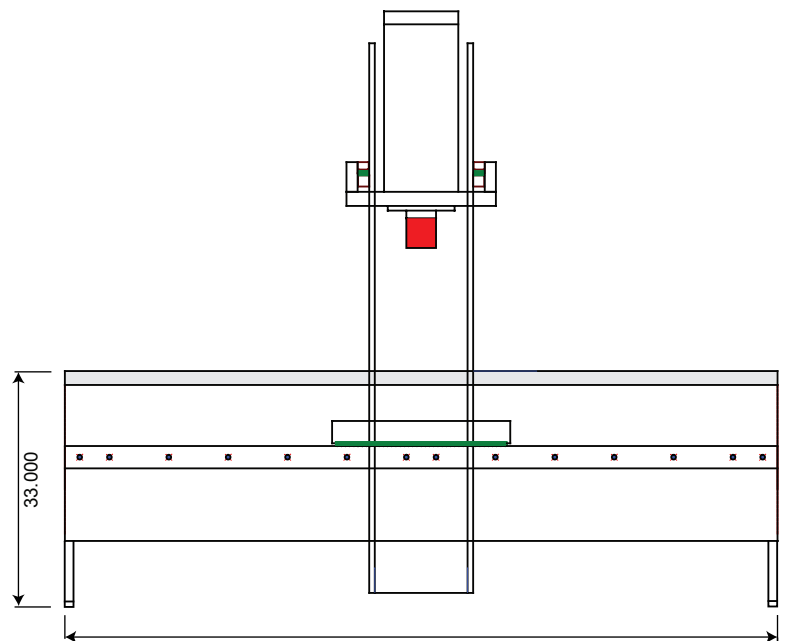

Side View